



PANDA AUDIO

Small Speakers Big Sound

Since 1986

Commercial Audio Installations

For Your Home, Retail Showrooms, Departmental Stores, Corporate Offices, Hotels,
Restaurants and More.

ABOUT PANDA AUDIO®

In our tradition of giving customers what they want, it is time to rock out at home, or your office, with the latest in home theatre systems from **PANDA AUDIO®**. Whether it is Earth shattering sub-woofers , towering floor standing speakers, custom made in wall components, or all weather outdoor speakers, **PANDA AUDIO®** has got it all!

Many people watch movies at home with an LED, but are frustrated by the dull and lifeless sound. Let's face it, when you're used to hearing the dynamic sound offered in today's cinemas, the sound from your LED speakers are pale in comparison. If this is your situation, **PANDA AUDIO®** has got great news! *We have designed everything to make your home theatre system, match your favourite cinema experience.*

HEAR THE TRUTH: From your home, office or retail stores, to the outdoors, and the stage, listen on anything less than **PANDA AUDIO®**, and you're not hearing the truth!

BIG SOUND. SMALL SPEAKERS. ALWAYS READY TO GO. PERFORMANCE, SIMPLICITY & STYLE.

A complete range of speaker components, amplifiers & more are available under one roof to suit every & any budget. **CHOUDHARY TRADING CORPORATION**, serving the electronic industry since 1961, providing audio-video components for more than a decade, established a tradition of bringing people fine sound entertainment. Today we offer the most innovative and best of audio, home theatre and hi-fi components. Discover the full possibilities of home cinema entertainment with **PANDA AUDIO®** speaker components & amplifiers. Your loud speakers contribute most to what you hear from your system. Thoroughly audition your speakers before buying them.

How can you decide... Why Choose **PANDA AUDIO®**?

*Better sound makes everything better. The technologies found in our systems, make it easier as well. Discover the full potential of home theatre only from **PANDA AUDIO®***

SPEAKERS

KV-808 Tower Speakers

Features

- 2.0 Stereo Audio Amplifiers.
- 5.1 Home Theatre Amplifiers.
- Dual Woofers with Silk DOME Tweeter.
- 100 Watts per Channel.
- Wooden Ported Bass Reflex Cabinets.

Specs

| | |
|------------------------|--|
| Suitable For | Homes, Gyms, Studios, Dance Academies and more |
| Loudspeaker Type | 2.0 Floor Standing Towers, 3 Way |
| LF Woofer | Dual Mid Bass Woofers 5.25 inch |
| HF Tweeter | 1 inch Silk Dome Tweeter / Ferro Fluid Cooled |
| Impedance | 8 ohms |
| Power Handling | 100 Watts RMS per Channel |
| Sensitivity | 88 dB |
| Frequency Response | 60 - 20 kHz |
| Net Weight (1 Pair) | 22 Kg |
| Magnet | Ferrite |
| Colours | Pearl Black, Pearl White, Silver Grey |
| Dimensions (H x W x D) | 22.5 x 24.5 x 77.5 cm |



KV-707-T Tower Speakers

For all the Tower Speaker fans, PANDA AUDIO® offers this gorgeous set of tower speakers which provide a deep, rich bass & enhanced performance. Here are some interesting features:

- The direct floor reflecting standing speakers have 6.5 inch woofers and 1 dome tweeter.
- Two 6.5 inch drivers with aluminium voice coil & butyl rubber surround, are specially imported to suit the Indian climate in order to beat high temperatures & humidity levels while giving optimum performance.
- The low frequency cone driver is extremely light & yet stiff to extend the bass response down to 25 Hz.
- The highs are handled by extremely effective dome tweeters to reach 20,000 Hz.
- The towers are built to maximise the sensational sound of digital audio and video by employing a powerful drive system with a ferrite magnet, aluminium voice coil, high linearity suspension & high frame strength.
- The woofer features extreme efficiency & sensitive response to provide clear dialogues, powerful effects & sound with a sense of depth & scale.

Specs

| | |
|------------------------|--|
| Suitable For | Gyms, Studios, Dance Academies and more. |
| Woofer | 2 Nos, 16cm Butyl Rubber Surround, Compressed Cone |
| Tweeter | Single High Wattage Dome Tweeter |
| Input | 120 - 300 RSM Watts Max |
| Impedance | 8 ohms |
| Frequency Range | 25 Hz - 20 kHz |
| Weight | 11Kg per unit without packaging |
| Sensitivity | 91 dB |
| Dimensions (W x H x D) | 22 x 77.5 x 22.5 cm |
| Colours | Wood Finish / Black Ash Finish / Black |



KV-808-BS Book Shelf Speakers



Features

- 2.0 Stereo Amplifiers / 5.1 Home Theatre System / 5.1 Home Theatre Amplifier.
- Dual Woofers with Silk Dome Tweeter.
- 100 Watts per Channel.

Specs

Suitable For

Loudspeaker Type

LF Woofer

HF Tweeter

Impedance

Power Handling

Sensitivity

Frequency Response

Net Weight (1 Pair)

Speaker Surround Sound Channel Configuration

Colour

Dimensions (H x W x D)

Homes, Offices, Studios, Academies and more.

2 Way

Dual 5.25 inch Kevlar Cone Woofer

1 inch Silk Dome Tweeter

8 ohms

100 Watts RMS Max per Channel

88 dB

60 - 20 kHz

14 Kg

2.0 Channel

Black / White / Pearl or Piano Wood, Ported Bass

Reflex Cabinet

41 x 22.5 x 24.5 cm



KV-508-BS Book Shelf Speakers

Features

- High Wattage Book Shelf speakers.
- Recommended Use: Main / Effect.
- Each unit has an enclosed design front ported Bass Reflex.

Specs

| | |
|------------------------|--|
| Suitable For | Homes, Offices, Studios, Academies and more. |
| Loudspeaker Type | 2 Way |
| LF Woofer | 7.8 inch Woofer, Butyl, Rubber Surround |
| HF Tweeter | 1 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Power Handling | 60 Watts RMS - 120 Watts Max |
| Frequency Response | 25 Hz to 20 kHz |
| Sensitivity | 90 dB |
| Net Weight (1 Pair) | 12 Kg |
| Colour | Black Wood Finish |
| Dimensions (H x W x D) | 28 x 48.5 x 29.5 cm |



KV-8290-BS

Specs

| | |
|------------------------|--|
| Suitable For | Homes, Offices, Studios, Academies and more. |
| Loudspeaker Type | 2 Way |
| LF Woofer | 4 inch Woofer, Butyl, Rubber Surround |
| HF Tweeter | 1 inch Silk Dome Tweeter |
| Impedance | 6 ohms |
| Power Handling | 60 Watts RMS - 120 Watts Max |
| Frequency Response | 25 Hz to 20 kHz |
| Sensitivity | 90 dB |
| Net Weight (1 Pair) | 9 Kg |
| Colour | Black Wood Finish |
| Dimensions (H x W x D) | 34 x 22 x 23.5 cm |



PA-558

Specs

Suitable For

Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Poolside and more.

Indoor/Outdoor

Loudspeaker Type

2 Way On Wall, Book Shelf, Bass Reflex

RMS

100 Watts

LF Woofer

5.5 inch Polypropylene Cone

HF Tweeter

0.75 inch Silk Dome

Impedance

8 ohms

Power Handling

100 Watts RMS

Sensitivity

89 dB

LMT

Optional

Frequency Response

65 Hz - 20 kHz

Net Weight (1 Pair)

3.2 Kg

Magnet

Neodymium

Colour

Black / White

Dimensions (H x W x D)

26.5 x 23.5 x 22.2 cm

Applicable for 100 V Input

Optional

Clamps

Adjustable Wall Mounts



PA-558P 2 Way Pendant Speaker

Specs

| | |
|----------------------------|---|
| Suitable For | Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Indoor/Outdoor |
| Loudspeaker Type | 2 Way |
| LF Woofer | 5.5 inch Polypropylene Cone |
| HF Tweeter | 0.75 inch Silk Film Dome |
| Impedance | 8 ohms |
| Power Handling | 100 Watts RMS |
| Sensitivity | 90 dB |
| LMT | Optional |
| Frequency Response | 65 Hz - 20 kHz |
| Net Weight (1 Pair) | 3.2 Kg |
| Magnet | Neodymium |
| Colour | Black / White |
| Dimensions (H x W x D) | 26.5 x 23.5 x 22.2 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Mounts |



PA-507 2 Way Passive On Wall Speaker

Specs

| | |
|----------------------------|--|
| Suitable For | Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Poolside and more. Indoor/Outdoor (Upto 1200 Sq. Ft.) |
| Loudspeaker Type | 2 Way |
| LF Woofer | 5 inch Polypropylene Cone |
| HF Tweeter | 1 inch Silk Film Dome |
| Impedance | 8 ohms |
| Power Handling | 60 Watts RMS - 100 Watts Max |
| Sensitivity | 89 dB |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 4.6 Kg |
| Magnet | 10.9 Oz |
| Colour | Black |
| Dimensions (H x W x D) | 25.6 x 16.7 x 21.8 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Mounts |



PA-408 2 Way Passive On Wall Speaker

Specs

| | |
|----------------------------|--|
| Suitable For | Homes , Corporate Offices, Gyms, Dance Academies, Studios, Outdoor Patios, Gardens, Poolside and more. (Upto 1000 Sq. Ft.) |
| Loudspeaker Type | 2 Way On Wall, Book Shelf, Bass Reflex |
| LF Woofer | 4 inch Polypropylene Cone Mid Bass |
| HF Tweeter | 0.75 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Power Handling | 60 Watts RMS - 100 Watts Max |
| Sensitivity | 89 dB |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 2.9 Kg |
| Magnet | Neodymium |
| Colour | Black / White |
| Dimensions (H x W x D) | 20 x 18 x 16.1 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Mounts |



PA-407 Passive On Wall Speakers

Specs

Suitable For

Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Indoor/Outdoor.
(Upto 500 Sq. Ft.)

Loudspeaker Type

2 Way On Wall, Book Shelf, Bass Reflex

LF Woofer

4 inch Polypropylene Cone Mid Bass

HF Tweeter

1 inch Polycarbonate Tweeter

Impedance

8 ohms

Sensitivity

89 dB

Power Handling

50 Watts RMS - 80 Watts Max

LMT

Optional

Frequency Response

60 Hz - 20 kHz

Net Weight (1 Pair)

3 Kg

Magnet

8.9 OZ

Colour

Black

Dimensions (H x W x D)

21.5 x 14.5 x 12 cm

Applicable for 100 V Input

Optional

Clamps

Adjustable Wall Clamps



PA-307 2 Way Passive On Wall Speaker



Specs

| | |
|------------------------|--|
| Suitable For | Offices, Homes, Retail Stores, Petrol Pumps, Restaurants, Garden or Pool Areas and more. (Up to 700 Sq. Ft.) |
| Loudspeaker Type | 2 Way |
| LF Woofer | 3 inch Polypropylene Woofer |
| HF Tweeter | 1 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Power Handling | 40 Watts RMS - 60 Watts Max |
| Sensitivity | 85 dB |
| LMT | Optional |
| Frequency Response | 100 Hz - 20 kHz |
| Net Weight | 1.5 Kg |
| Magnet | 4.9 Oz |
| Colours | Black |
| Dimensions (H x W x D) | 16.5 x 11.5 x 16.5 cm |
| Clamps | Adjustable Wall Mounts |

KV-508PT Pendant Speakers

Features

- Indoor, Outdoor 2 Way On Wall Speaker.
- Used in corporate office, retail showrooms, departmental stores, petrol pumps, and more.
- Can be used as a pendant, on wall or soil mounted speaker.

Specs

| | |
|------------------------|---|
| Suitable For | Home , Corporate office, Gym , Dance Academies , Studio , Patios , Garden , Poolside and more |
| Loudspeaker Type | 2 Way Pendant Speaker |
| LF Woofer | 5 inch Polypropylene Cone |
| HF Tweeter | 1 inch Silk Film Dome Tweeter |
| Impedance | 8 ohms. |
| Sensitivity | 85 dB |
| Power Handling | 60 Watts RMS - 100 Watts Max |
| LMT | Yes |
| Frequency Response | 70 Hz - 20 kHz |
| Net Weight (1 Pair) | 4.6 Kg |
| Magnet | Ferrite |
| Colours | Black |
| Dimensions (H x W x D) | 19 x 13.8 x 13.8 cm |
| Clamps | Adjustable Wall Mount Adjustable Soil Mounting Adjustable Ceiling Mount |




PA-869 Satellite Speakers

Specs

| | |
|------------------------|------------------------------------|
| Suitable For | Homes, Corporate Offices and more. |
| Loudspeaker Type | On Wall 1 Way |
| LF Woofer | 2.5 inch Full Range Driver |
| HF Tweeter | N/A |
| Impedance | 8 ohms. |
| Sensitivity | 87 dB |
| Power Handling | 25 Watts RMS - 50 Watts Max |
| LMT | Optional |
| Frequency Response | 100 Hz - 20 kHz |
| Net Weight (1 Pair) | 1 Kg |
| Magnet | Ferrite |
| Colours | Black |
| Dimensions (H x W x D) | 9.6 x 8.4 x 10.8 cm |
| Clamps | Adjustable Wall Mounts |

Supplied with following configurations:

- 'X' over for hi-fi stereo / home theatre + install sound applications
- LMT for install sound application (supplied on request)

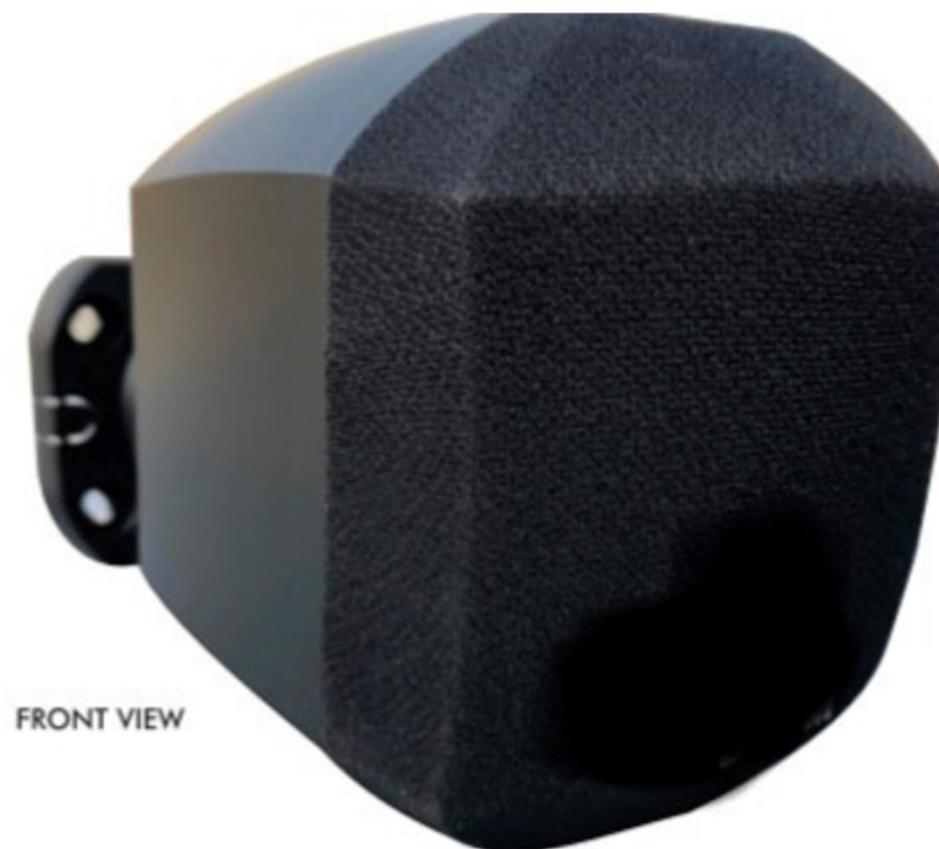

FRONT VIEW

SIDE VIEW SHOWING
THE PIVOT ABLE WALL
MOUNT BRACKET



KV-8789-S On Wall Cube Speakers



Panda Audio® Home Cinema Satellite Speakers feature 5 voice-matched speakers for Two Main Channel / Two Front Channel / One Centre Channel. This setup brings superior surround sound to your living room & has colour-coded cables and wall mount brackets, the setup is extremely user friendly.

Features & Specs

- Satellite Speakers for main, front, surround & centre channel wide range frequency transducer.
- 2.25 inch Wide Range Drivers
- Low frequency cut off cross over network with circuit protection.
- Dimensions (W x H x D): 7 x 14 x 10 cm
- Weight: 1 Kg each.
- KV-8789-S cannot be used individually as 2.0 setup.

KV-871 On Wall Cube Speakers



Specs

Suitable For

Home, Corporate Offices, Retail Stores, Hospitals and more.

Loudspeaker Type

On Wall Cubes

LF Woofer

2.25 inch Full Range Driver

Impedance

8 ohms

Power Handling

25 Watts RMS - 50 Watts Max

Sensitivity

87 dB

LMT

Optional

Frequency Response

100 Hz - 20 kHz

Net Weight (1 Pair)

1 Kg

Magnet

Ferrite

Colours

Black

Dimensions (H x W x D)

70 X 70 X 100 mm

Clamps

justable Wall Mounts

KV-804 In Wall Ceiling Speakers



Specs

Loudspeaker Type

2 Way

LF Woofer

4 inch Polypropylene Cone

HF Tweeter

½ inch Polycarbonate

Impedance

8 ohms

Sensitivity

88 dB

Power Handling

20 Watts zrms - 40 Watts Max

LMT

2.5 W, 5 W

Frequency Response

90 Hz - 20 kHz

Net Weight (1 Pair)

2 Kg

Magnet

Ferrite

Ceiling Cut Out

14 cm


Colours

White

Dimensions (Diameter x Depth)

17.5 x 6.5 cm

KV-608 In Wall Ceiling Speakers

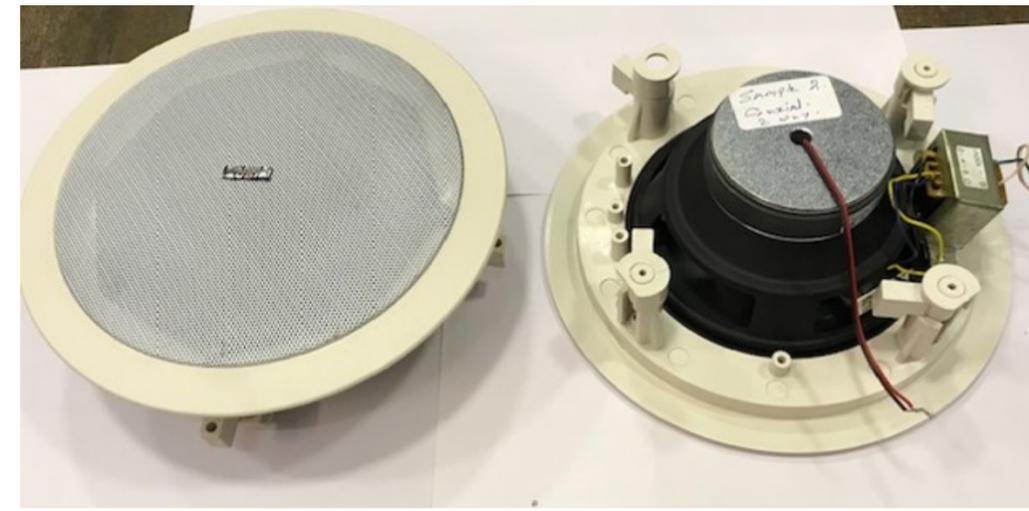

Specs

Loudspeaker Type

LF Woofer

HF Tweeter

Impedance

Power Handling

Sensitivity

LMT

Frequency Response

Net Weight (1 Pair)

Magnet

Colours

Dimensions (Diameter x Depth)

2 Way

6.5 inch / 16 cm Polypropylene Cone

1 inch Ferrofluid Cooled Dome Tweeter

8 ohms

60 Watts RMS - 120 Watts Max

89 dB

Yes

45 Hz - 20 kHz

1.5 Kg

Ferrite

White

19 x 7.1 cm

KV-201 In Wall Ceiling Speakers



This high performance, virtual loudspeaker system is engineered for reproducing voice & music, background & foreground sound.

It is a flush-mount speaker which works with different room décorés & layouts.

It is designed for a variety of business applications including retail stores, restaurants, hospitals, and many more.

Features

- Driver Unit: 6.5 inch 60 Watts
- Diameter: 9 inches
- Metal Grill

Rock Speaker KV-727-R



Specs

Suitable For

Indoor, Outdoor, Garden, Corporate Office, etc.

Loudspeaker Type

8 inch Polypropylene Woofer

RMS

100 W

LF Woofer

8 inches

Impedance

8 ohms

Power

200 W Peak

L.M.T.

Optional

Frequency Response

40 Hz - 20 KHz

Net Weight

8 Kgs

Magnet

Ferrite

Colours

Natural Stone

Dimensions (H x W x D)

12.60 x 17 x 14 inches

Applicable for 100 V Input

Optional

KV-AB808 Active Sub Woofer

5.1 Active Sub Woofer ---Tik ---Tik---Tik-----BOOM !

The Ultimate Awesome Experience - Connect to ANY 5.1 Receiver, ANY MAKE

| | |
|--|---------------------------------------|
| Drivers | 14 cm |
| Sub-Woofer | 2 Nos |
| Output | 135 Watts RMS |
| Active Across Over | Yes |
| High/Low Level Input Terminal | Yes |
| Frequency Range | 10 Hz to 200 Hz |
| Frequency Control | 40 Hz to 120 Hz Continuously Variable |
| Protection Over Load & DC | Yes |
| Reverse Phase Control | Yes |
| Damping Factor | More Than 150 |
| E Q Control 45 Hz Centre Frequency | + 12 dB Boost |
| Induction Amp | On / Clip |
| Auto Mute / Power | Yes |
| Auto Shut Down | After 20 Minutes of Inactivity |
| Auto Power Up | When Signal is Detected. |
| Colour | Black Ash Vinyl (Scratch Resistance) |
| Dimensions (W x H x D) | 22 x 36 x 53 cm |
| Net Weight | 17Kg |
| Drivers for Satellite Jewels | 5 cms Wide Range -- 10 Nos |
| Magnetically Shielding Jewels | Yes |
| Low / High Cut Off Frequency Crossover | Yes |
| Input Power | 125 Watts RMS Per Channel |
| Effective Frequency Range | 51 Hz to 20 Hz |



Passive Sub-Woofer



Specs

Drivers

5.25 inch X 2 Hard Compressed Cone

Sub-Woofer

YES

Output

100 W RMS

Active Across Over

Built In Crossover

High/Low Level Input Terminal

High Level Input Terminal

Frequency Range

25 Hz - 200 Hz

Colour

BLACK

Dimensions (W x H x D)

205 X 365 X 485 mm

Net Weight

11 Kg

KV-904 On Wall Speakers

Specs

| | |
|------------------------|--|
| Suitable For | Home , Corporate office, Gym , Dance Academies, Studio , Patios , Garden , Poolside and more |
| Loudspeaker Type | 2 Way On Wall, Book Shelf, Bass Reflex |
| LF Woofer | 5 inch Polypropylene Cone Mid Bass |
| HF Tweeter | 1 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Sensitivity | 84 dB |
| Power Handling | 60 Watts RMS - 120 Watts Max |
| LMT | Yes |
| Frequency Response | 65 Hz - 20 kHz |
| Net Weight (1 Pair) | 6 Kg |
| Colours | Black |
| Dimensions (H x W x D) | 35 x 18.5 x 20 cm |



10 Inch Passive Sub-Woofer



SUB TOP VIEW



SUB BOTTOM VIEW

Features

- Portable audio system.
- Sub-woofer for 5.1 / 7.1 / 7.2 Home Theatre Systems.

Specs

| | |
|------------------------|----------------------------|
| Loudspeaker Type | 10 inch Sub-Woofer |
| RMS | 150 W |
| LF Woofer | 10 inch Cone |
| Impedance | 8 ohms. Sensitivity: 84 dB |
| Power | 300 Watts Max |
| Frequency Response | 30 Hz - 300 H z |
| Net Weight | 11 Kg |
| Magnet | Ferrite |
| Colours | Black |
| Dimensions (H x W x D) | 310 x 420 x 420 mm |

Specs

| | |
|--------------------------------------|---------------------------|
| Driver Type | SILK DOME TWEETER |
| Size | 1 inch |
| Motor | Ferrite |
| Frame | Plastic Faceplate |
| Impedance | 8 Ω |
| Fabric Driver Size | 1 Inch |
| DC Resistance | 6.53 Ω |
| Resonant Frequency | 1136.9 Hz |
| Half Space Sensitivity | At 2.83V- 91.71 dB |
| Sensitivity | At 1W/1m- 91.3 dB |
| Rated Noise Power | (IEC 268-5 18.1)-100 W |
| Test Spectrum Bandwidth | 1KHz-20KHz 12 dB/Oct |
| Effective Piston Area | 6.2 cm ² |
| Moving Mass | 0.4 g |
| Motor Force Factor | 3.24 Tm |
| Voice Coil Inner Diameter | 25.4 mm |
| Gap Height | 3 mm |
| Maximum Linear Excursion | 0.5 mm, Ferrofluid Cooled |
| Minimum Impedance | 7.27 Ω |
| Voice Coil Inductance | 0.04 mH |
| Mechanical Q Factor | 2.21 |
| Electrical Q Factor | 1.58 |
| Total Q Factor | 0.92 |
| Ratio | 1233.08 fs/Qts |
| Energy Bandwidth Product ((1/Qes)fs) | 720.15 |

PA-10DT



Features

- Silk Dome Tweeter for Smooth Frequency response. Sculpted, recessed-loaded, round 4-hole, faceplate smooth, extended response and high efficiency 1" textile silk dome Ferrofluid cooled voice coil.
- The tweeter comes with a compact faceplate with recessed mounting holes.
- Silk Dome tweeter features a 8 ohm 25 mm voice coil, a damped fabric dome for smooth frequency response, performance, and ferrofluid in the gap of the ferrite motor, providing enhanced cooling of the voice coil.

AMPLIFIERS

KV-9898-A



| | |
|-------------------------|---|
| Impedance | 4 - 8 ohms |
| Power | 100 W X 1 Sub-Woofer / 60 W X 5 Channel |
| Frequency Response | 20Hz - 20Khz |
| USB Input | Yes |
| Bluetooth | Yes |
| AUX Input | Yes |
| 6 Channel Input | Yes |
| Equalizer | Yes |
| FM Radio | Yes |
| Net Weight | 6 Kgs |
| Colour | Black |
| Dimensions (H x W x D)t | 65 X 435 X 320 mm |

KV-2050 Public Address Amplifier



Features

- Built-In USB + FM Receiver
- 3 microphone input with mic 1 as priority input.
- Microphone inputs have echo, repeat & delay functions.
- 2 Auxiliary Input.
- Master Volume, active bass & treble tone controls.
- Chime function for announcements & siren functions for emergencies.
- 6 zone output with stepped volume control for each zone.
- Auxiliary output available to daisy chain amplifiers or to connect as active subwoofer.
- Toroidal transformers for mains & output.
- Brushed aluminium anodised panel with aluminium knobs offering a rich luxurious finish.



KV-505-A

PANDA AUDIO® KV-505-AB Bluetooth Device / Integrated Stereo Amplifier.

Features

- Discrete Circuitry for Low distortion and Low Noise.
- Balancing Circuit for DC & Short Circuit Protection.
- Efficiency with Class AB Operation.
- Complementary High Current Linear Output Stage.
- Microphone Input with Sing Along Facility.



Bluetooth Connection

Output Power (per channel)
0.1% THD, 60 Watts RMS Distortion

Frequency Response

Damping Factor

Noise

Sensitivity

Voltage Gain

Input Impedance

Amplifier Protection

Load Protection

Topology

Output Circuit Type

Controls

Tone Controls

Inputs

Dimensions (H x W x D)

Weight

External / Provided with the Set

8 ohms 20 Hz to 20kHz 0.1% THD, 30 Watts RMS 4 ohms 1kHz
SMPTE-IM, less than 0.05% THD less than 0.1% at rated Power(22Hz-
20kHz)

22 Hz to 20 kHz, +0 / -1 dB, 1 Watt

Greater than 150

100 dB below rated output (A weighed)

140 mV (for rated power at 4 ohms) CD, DVD, AUX Input, Volume
Control at Max

39 dB (CD, DVD, AUX input, Volume at Max)

20K ohms unbalanced

Full Short Circuit, Open Circuit, Ultrasonic, & RF Protection

On / Off Muting & DC - Fault Protection

2 Channel Power Amplifier with Integrated Tone Control, balance &
Input Sector

Complimentary Linear Outputs

Logic Controlled Selector for Inputs. Rotary Controls for Bass, Balance,
Treble & Volume

Active Baxandall tyoe +/- 12 dB Cut & Boost

CD, DVD & AUX (Stereo) Mike (Mono Distrebuted equally to both
channels) Mix Signal (Stereo distributed & mised equally)

5.7 x 42.6 x 30 cm

4.3 Kg net, 5.5 Kg shipping

KV-484-A Audio Amplifier

Digital Stereo, Eight Channel Amplifier.

For home, restaurant, departmental stores, hospitals, temples, hotels, gyms, spas, and more.

Specially designed to provide soft background music.

Specs

| | |
|------------------------------|--|
| Power Output | 80 Watts MAX per Channel at 4 Ohms 40 Watts MAX per Channel at 8 Ohms |
| Frequency Response | 20 Hz - 20 Hz |
| Distortion | < 0.5% |
| Input Impedance | 47K |
| Input Sensitivity | < 300 Mv |
| Bass Adjustment | + / - 10 Db at 100 Hz |
| Treble Adjustment | + / - 10 Db at 10 kHz |
| Microphone Input Sensitivity | < 20 Mv |
| Dimensions | (W x D x H) 43 x 31.5 x 7 cm |
| Inputs | CD, DVD, Microphone |

Features

- Four Stereo Amplifier in 1 Unit.
- FM Radio
- USB / SD / MMC Card Reader.
- Playback of music can be sourced from any input channel.
- Separate speaker connections for 8 speakers.
- Separate Volume, Bass & Treble controls for every pair of speakers connected.
- Remote Control.
- Karaoke Input.



NOTE: Specification subject to change without notice.

KV-280-A



Specs

- Distortion SMPTE-IM, less than 0.05%
- THD Less than 0.1% at rated Power (22Hz-20kHz)
- Damping Factor Greater Than 150
- Noise 100 dB below rated output below rated out
- Impedance 4-8 ohms
- Output Power Watts RMS per channel 4 ohms 20Hz to 20kHz 0.1% THD 200 W
8 ohms 20 Hz to 20kHz 0.1% THD 120 W
- Sensitivity 140mV (for rated Power at 4 ohms)
- Frequency Response 22 Hz to 20kHz , +0/-1 dB.1 Watt
- Amplifier Protection Full Short Circuit, Open Circuit, Ultrasonic
- Load Protection On/Off Muting and DC -fault Protection
- Topology 2 Channel Power Amplifier Integrated
- Tone Controls Active Baxandall Type +/- 12dB Cut & Boost
- Controls Logic Controlled selector inputs
- Net Weight 9 Kg . Shipping 12 Kg
- Dimensions (H x W x D) 83 X 425 X 360 mm

KV-100-A



Specs

| | |
|------------------------------------|--|
| Distortion | SMPTE-IM, less than 0.05% |
| THD | Less than 0.1% at rated Power (22Hz-20kHz) |
| Damping Factor | Greater Than 150 |
| NOISE | 100 dB below rated output below rated out |
| Impedance | 4-8 ohms |
| Output Power Watts RMS per channel | 4 ohms 20Hz to 20kHz 0.1% THD 100 W 8 ohms 20 Hz to 20kHz 0.1% THD 70 W |
| Sensitivity | 140mV (for rated Power at 4 ohms) |
| Frequency Response | 22 Hz to 20kHz , +0/-1 dB.1 Watt |
| Amplifier Protection | Full Short Circuit, Open Circuit, Ultrasonic |
| Load Protection | On/Off Muting and DC -fault Protection |
| Topology | 2 Channel Power Amplifier Integrated |
| Tone Controls | Active Baxandall Type +/- 12dB Cut & Boost |
| Controls | Logic Controlled selector inputs |
| Net Weight | 9 Kg . Shipping 12 Kg |
| Dimensions (H x W x D) | 83 x 425 x 360 mm |

COMBOS

KV-878

Cube Speaker Specs

- Satellite Speakers for main, front, surround & centre channel wide range frequency transducer.
- 2.25 inch Wide Range Drivers
- Low frequency cut off cross over network with circuit protection.
- Dimensions (W x H x D): 7 x 14 x 10 cm
- Weight: 1 Kg each.
- KV-8789-S cannot be used individually as 2.0 setup.

Tower Speaker Specs

| | |
|------------------------|--|
| Suitable For | Gyms, Studios, Dance Academies and more. |
| Woofer | 2 Nos, 16cm Butyl Rubber Surround, Compressed Cone |
| Tweeter | Single High Wattage Dome Tweeter |
| Input | 300 Watts/120 Watts |
| Impedance | 8 ohms |
| Power | Max / Nominal |
| Frequency Range | 25 Hz - 20,000 Hz |
| Weight | 11Kg per unit without packaging |
| Sensitivity | 91 dB |
| Dimensions (W x H x D) | 22 x 77.5 x 22.5 cm |
| Colours | Wood Finish / Black Ash Finish / Black |



For 5.1 amplifier specifications refer to model KV-9898-A shown above.

HT-558

Speaker Specs

| | |
|----------------------------|---|
| Suitable For | Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Poolside and more. Indoor/Outdoor |
| Loudspeaker Type | 2 Way On Wall, Book Shelf, Bass Reflex |
| RMS | 100 Watts |
| LF Woofer | 5.5 inch Polypropylene Cone |
| HF Tweeter | 0.75 inch Silk Dome |
| Impedance | 8 ohms |
| Power Handling | 100 Watts RMS |
| Sensitivity | 89 dB |
| LMT | Optional |
| Frequency Response | 65 Hz - 20 kHz |
| Net Weight (1 Pair) | 3.2 Kg |
| Magnet | Neodymium |
| Colour | Black / White |
| Dimensions (H x W x D) | 26.5 x 23.5 x 22.2 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Mounts |



For 5.1 amplifier specifications refer to model KV-9898-A shown above.

HT-408

Speaker Specs

| | |
|----------------------------|--|
| Suitable For | Homes , Corporate Offices, Gyms, Dance Academies, Studios, Outdoor Patios, Gardens, Poolside and more. (Upto 1000 Sq. Ft.) |
| Loudspeaker Type | 2 Way On Wall, Book Shelf, Bass Reflex |
| LF Woofer | 4 inch Polypropylene Cone Mid Bass |
| HF Tweeter | 0.75 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Power Handling | 60 Watts RMS - 100 Watts Max |
| Sensitivity | 89 dB |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 2.9 Kg |
| Magnet | Neodymium |
| Colour | Black / White |
| Dimensions (H x W x D) | 20 x 18 x 16.1 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Mounts |



For 5.1 amplifier specifications refer to model KV-9898-A shown above.

KV-8789

Cube Speaker Specs

- Satellite Speakers for main, front, surround & centre channel wide range frequency transducer.
- 2.25 inch Wide Range Drivers
- Low frequency cut off cross over network with circuit protection.
- Dimensions (W x H x D): 7 x 14 x 10 cm
- Weight: 1 Kg each.
- KV-8789-S cannot be used individually as 2.0 setup.

For 5.1 amplifier specifications refer to model KV-9898-A shown above.



KV-8782.1

Cube Speaker Specs

- Satellite Speakers for main, front, surround & centre channel wide range frequency transducer.
- 2.25 inch Wide Range Drivers
- Low frequency cut off cross over network with circuit protection.
- Dimensions (W x H x D): 7 x 14 x 10 cm
- Weight: 1 Kg each.
- KV-8789-S cannot be used individually as 2.0 setup.



For 5.1 amplifier specifications refer to model KV-9898-A shown above.

KV-8789-HT

Cube Speaker Specs

- Satellite Speakers for main, front, surround & centre channel wide range frequency transducer.
- 2.25 inch Wide Range Drivers
- Low frequency cut off cross over network with circuit protection.
- Dimensions (W x H x D): 7 x 14 x 10 cm
- Weight: 1 Kg each.
- KV-8789-S cannot be used individually as 2.0 setup.



For 5.1 amplifier specifications refer to model KV-9898-A shown above.

HT-507

Speaker Specs

| | |
|----------------------------|--|
| Suitable For | Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Poolside and more. Indoor/Outdoor (Upto 1200 Sq. Ft.) |
| Loudspeaker Type | 2 Way |
| LF Woofer | 5 inch Polypropylene Cone |
| HF Tweeter | 1 inch Silk Film Dome |
| Impedance | 8 ohms |
| Power Handling | 60 Watts RMS - 100 Watts Max |
| Sensitivity | 89 dB |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 4.6 Kg |
| Magnet | 10.9 Oz |
| Colour | Black |
| Dimensions (H x W x D) | 25.6 x 16.7 x 21.8 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Mounts |



For 5.1 amplifier specifications refer to model KV-9898-A shown above.

HT-307

Speaker Specs

| | |
|------------------------|--|
| Suitable For | Offices, Homes, Retail Stores, Petrol Pumps, Restaurants, Garden or Pool Areas and more. (Up to 700 Sq. Ft.) |
| Loudspeaker Type | 2 Way |
| LF Woofer | 3 inch Polypropylene Woofer |
| HF Tweeter | 1 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Power Handling | 40 Watts RMS - 60 Watts Max |
| Sensitivity | 85 dB |
| LMT | Optional |
| Frequency Response | 100 Hz - 20 kHz |
| Net Weight | 1.5 Kg |
| Magnet | 4.9 Oz |
| Colours | Black |
| Dimensions (H x W x D) | 16.5 x 11.5 x 16.5 cm |
| Clamps | Adjustable Wall Mounts |



For 5.1 amplifier specifications refer to model KV-9898-A shown above.

HT-407

Speaker Specs

| | |
|----------------------------|---|
| Suitable For | Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Indoor/Outdoor. (Upto 500 Sq. Ft.) |
| Loudspeaker Type | 2 Way On Wall, Book Shelf, Bass Reflex |
| LF Woofer | 4 inch Polypropylene Cone Mid Bass |
| HF Tweeter | 1 inch Polycarbonate Tweeter |
| Impedance | 8 ohms |
| Sensitivity | 89 dB |
| Power Handling | 50 Watts RMS - 80 Watts Max |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 3 Kg |
| Magnet | 8.9 OZ |
| Colour | Black |
| Dimensions (H x W x D) | 21.5 x 14.5 x 12 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Clamps |



For 5.1 amplifier specifications refer to model KV-9898-A shown above.

KV-803-L



Speaker Specs

Suitable For

Retail Stores, Departmental Stores, Corporate Offices, Petrol Pumps, etc.

Loudspeaker

Dual Cone Ceiling Mount

RMS

30 W

Impedance

4-8 ohms

Power Output

10 W

LMT

YES

Frequency Response

40 Hz to 20kHz

Net Weight

3 Kg

Magnet

Ferrite

Colour

White with metal Grill

Dimensions

230 mm (Cut Out size : 200 mm

Clamps

Ceiling Mounts

Amplifier Features

Mic Input - 2

Mic Volume Adjust Volume Control

Bass Control

Treble Control

Mp3 Volume Control

Aux Volume Control

USB Input

SD Card Input

Mp3 Play / Pause Key

Mp3 Previous Song Key

Mp3 Next Song Key

Mp3 Repeat Song Key

Equaliser - Class/ Jazz / Rock / Bass / Pop / Normal

Input Select Mode : USB / SD / FM / AUX

60 Watts

KV-801



Cube Speaker Specs

- Satellite Speakers for main, front, surround & centre channel wide range frequency transducer.
- 2.25 inch Wide Range Drivers
- Low frequency cut off cross over network with circuit protection.
- Dimensions (W x H x D): 7 x 14 x 10 cm
- Weight: 1 Kg each.
- KV-8789-S cannot be used individually as 2.0 setup.

**8 Channel, 4 Stereo Zone Amplifier.
40 W per channel.**

Speaker Specs

Suitable For

Retail Stores, Departmental Stores, Corporate Offices, Petrol Pumps, etc.

Loudspeaker

Dual Cone Ceiling Mount

RMS

30 W

Impedance

4-8 ohms

Power Output

10 W

LMT

YES

Frequency Response

40 Hz to 20kHz

Net Weight

3 Kg

Magnet

Ferrite

Colour

White with metal Grill

Dimensions

230 mm (Cut Out size : 200 mm

Clamps

Ceiling Mounts

AS-307T4

Features

- Can be used outdoors.
- Has a built in FM Radio, MP3, USB Input, Microphone and Remote.
- Input to connect to any external source of music like phone, laptop, desktop, set top box, etc.

Speaker Specs

| | |
|------------------------|--|
| Suitable For | Offices, Homes, Retail Stores, Petrol Pumps, Restaurants, Garden or Pool Areas and more. (Up to 700 Sq. Ft.) |
| Loudspeaker Type | 2 Way |
| LF Woofer | 3 inch Polypropylene Woofer |
| HF Tweeter | 1 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Power Handling | 40 Watts RMS - 60 Watts Max |
| Sensitivity | 85 dB |
| LMT | Optional |
| Frequency Response | 100 Hz - 20 kHz |
| Net Weight | 1.5 Kg |
| Magnet | 4.9 Oz |
| Colours | Black |
| Dimensions (H x W x D) | 16.5 x 11.5 x 16.5 cm |
| Clamps | Adjustable Wall Mounts |



Amplifier Specs

| | |
|--------------------------|---|
| Rated Power | 30 Watts RMS Max |
| Power | 60 Watts |
| Input | Mic: 35MV / 600 ohms Aux: 400Mv / 10K Volume: Bass +- 10 dB / Treble +- 10dB at 10 Hz |
| Frequency Response | 80 Hz - 20kHz (+-3dB) |
| Power | AC220V/50Hz |
| Dimensions (H X W X D) | 65 x 280 x 180 mm |
| Weight | 1.5 Kg |

AS-307T

Features

- Can be used outdoors in a garden or near a pool.
- Amplifier with output of 30 Watts RMS , 60 Watts Max.
- Has built in FM Radio, MP3 - USB Input, Aux & Microphone.
- Has the input to connect to any external source of music, be it your phone , laptop, desktop, set top box, etc.
- Class D Audio amplifier with MP3 / FM Radio & USB input and remote.

Speaker Specs

| | |
|------------------------|---|
| Suitable For | Offices, Homes, Retail Stores, Petrol Pumps, Restaurants, Garden or Pool Areas and more. (Up to 700 Sq. Ft.) |
| Loudspeaker Type | 2 Way |
| LF Woofer | 3 inch Polypropylene Woofer |
| HF Tweeter | 1 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Power Handling | 40 Watts RMS - 60 Watts Max |
| Sensitivity | 85 dB |
| LMT | Optional |
| Frequency Response | 100 Hz - 20 kHz |
| Net Weight | 1.5 Kg |
| Magnet | 4.9 Oz |
| Colours | Black |
| Dimensions (H x W x D) | 16.5 x 11.5 x 16.5 cm |
| Clamps | Adjustable Wall Mounts |



Amplifier Specs

| | |
|------------------------|---|
| Rated Power | 30 Watts RMS Max |
| Power | 60 Watts |
| Input | Mic: 35MV / 600 ohms Aux: 400MV / 10K Volume: Bass +-10 dB / Treble +- 10 dB at 10 Hz |
| Frequency Response | 80 Hz - 20 kHz (+-3 dB) |
| Power | AC220V/50Hz |
| Dimensions (H X W D) | 65 X 280 x 180 mm |
| Weight | 1.5 Kg |

AS-507T4



Speaker Specs

Suitable For

Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Poolside and more. Indoor/Outdoor (Upto 1200 Sq. Ft.)

Loudspeaker Type

2 Way

LF Woofer

5 inch Polypropylene Cone

HF Tweeter

1 inch Silk Film Dome

Impedance

8 ohms

Power Handling

60 Watts RMS - 100 Watts Max

Sensitivity

89 dB

LMT

Optional

Frequency Response

60 Hz - 20 kHz

Net Weight (1 Pair)

4.6 Kg

Magnet

10.9 Oz

Colour

Black

Dimensions (H x W x D)

25.6 x 16.7 x 21.8 cm

Applicable for 100 V Input

Optional

Clamps

Adjustable Wall Mounts

Features

- Can be used outdoors in a garden or near a pool.
- Amplifier with output of 30 Watts RMS , 60 Watts Max.
- Has built in FM Radio, MP3 - USB Input, Aux & Microphone.
- Has the input to connect to any external source of music, be it your phone , laptop, desktop, set top box, etc.
- Class D Audio amplifier with MP3 / FM Radio & USB input and remote.

Amplifier Specs

Rated Power

30 Watts RMS

Power

60 Watts

Input

Mic: 35MV / 600 ohms

Aux: 400MV / 10K

Volume: Bass +- 10 dB / Treble +- 10 dB at 10 Hz

Frequency Response

80 Hz - 20 kHz (+-3dB)

Power

AC220V/50Hz

Dimension (H X W X D)

65 x 280 x 180 mm

Weight

2.5 Kg

AS-507T



Speaker Specs

| | |
|----------------------------|--|
| Suitable For | Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Poolside and more. Indoor/Outdoor (Upto 1200 Sq. Ft.) |
| Loudspeaker Type | 2 Way |
| LF Woofer | 5 inch Polypropylene Cone |
| HF Tweeter | 1 inch Silk Film Dome |
| Impedance | 8 ohms |
| Power Handling | 60 Watts RMS - 100 Watts Max |
| Sensitivity | 89 dB |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 4.6 Kg |
| Magnet | 10.9 Oz |
| Colour | Black |
| Dimensions (H x W x D) | 25.6 x 16.7 x 21.8 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Mounts |

Features

- Can be used outdoors in a garden or near a pool.
- Amplifier with output of 30 Watts RMS , 60 Watts Max.
- Has built in FM Radio, MP3 - USB Input, Aux & Microphone.
- Has the input to connect to any external source of music, be it your phone , laptop, desktop, set top box, etc.
- Class D Audio amplifier with MP3 / FM Radio & USB input and remote.

Amplifier Specs

| | |
|--------------------------|--|
| Rated Power | 30 Watts RMS |
| Power | 60 Watts |
| Input | Mic: 35MV / 600 ohms Aux: 400MV / 10K Volume: Bass +- 10 dB / Treble +- 10 dB at 10 Hz |
| Frequency Response | 80 Hz - 20 kHz (+-3dB) |
| Power | AC220V/50Hz |
| Dimensions (H X W X D) | 65 X 280 x 180 mm |
| Weight | 1.5 Kg |

AS-408T4



Speaker Specs

| | |
|----------------------------|--|
| Suitable For | Homes , Corporate Offices, Gyms, Dance Academies, Studios, Outdoor Patios, Gardens, Poolside and more. (Upto 1000 Sq. Ft.) |
| Loudspeaker Type | 2 Way On Wall, Book Shelf, Bass Reflex |
| LF Woofer | 4 inch Polypropylene Cone Mid Bass |
| HF Tweeter | 0.75 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Power Handling | 60 Watts RMS - 100 Watts Max |
| Sensitivity | 89 dB |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 2.9 Kg |
| Magnet | Neodymium |
| Colour | Black / White |
| Dimensions (H x W x D) | 20 x 18 x 16.1 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Mounts |

Features

- Can be used outdoors in a garden or near a pool.
- Amplifier with output of 30 Watts RMS , 60 Watts Max.
- Has built in FM Radio, MP3 - USB Input, Aux & Microphone.
- Has the input to connect to any external source of music, be it your phone , laptop, desktop, set top box, etc.
- Class D Audio amplifier with MP3 / FM Radio & USB input and remote.

Amplifier Specs

| | |
|------------------------|--|
| Rated Power | 30 Watts RMS |
| Power | 60 Watts |
| Input | Mic: 35MV / 600 ohms Aux: 400MV / 10K Volume: Bass +- 10 dB / Treble +- 10 dB at 10 Hz |
| Frequency Response | 80 Hz - 20 kHz (+-3dB) |
| Power | AC220V/50Hz |
| Dimensions (H X W D) | 65 X 280 x 180 mm |
| Weight | 1.5 Kg |

AS-408T

Speaker Specs

| | |
|----------------------------|--|
| Suitable For | Homes , Corporate Offices, Gyms, Dance Academies, Studios, Outdoor Patios, Gardens, Poolside and more. (Upto 1000 Sq. Ft.) |
| Loudspeaker Type | 2 Way On Wall, Book Shelf, Bass Reflex |
| LF Woofer | 4 inch Polypropylene Cone Mid Bass |
| HF Tweeter | 0.75 inch Silk Dome Tweeter |
| Impedance | 8 ohms |
| Power Handling | 60 Watts RMS - 100 Watts Max |
| Sensitivity | 89 dB |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 2.9 Kg |
| Magnet | Neodymium |
| Colour | Black / White |
| Dimensions (H x W x D) | 20 x 18 x 16.1 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Mounts |



Features

- Can be used outdoors in a garden or near a pool.
- Amplifier with output of 30 Watts RMS , 60 Watts Max.
- Has built in FM Radio, MP3 - USB Input, Aux & Microphone.
- Has the input to connect to any external source of music, be it your phone , laptop, desktop, set top box, etc.
- Class D Audio amplifier with MP3 / FM Radio & USB input and remote.

Amplifier Specs

| | |
|-------------------------|--|
| Rated Power | 30 Watts RMS |
| Input | Mic: 35MV / 600 ohms Aux: 400MV / 10K Volume: Bass +- 10 dB / Treble +- 10 dB at 10 Hz |
| Frequency Response | 80 Hz - 20 kHz (+-3dB) |
| Power | AC220V/50Hz |
| Dimension (H X W X D) | 65 x 280 x 180 mm |
| Weight | 1.5 Kg |

AS-407T



Speaker Specs

| | |
|----------------------------|---|
| Suitable For | Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Indoor/Outdoor. (Upto 500 Sq. Ft.) |
| Loudspeaker Type | 2 Way On Wall, Book Shelf, Bass Reflex |
| LF Woofer | 4 inch Polypropylene Cone Mid Bass |
| HF Tweeter | 1 inch Polycarbonate Tweeter |
| Impedance | 8 ohms |
| Sensitivity | 89 dB |
| Power Handling | 50 Watts RMS - 80 Watts Max |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 3 Kg |
| Magnet | 8.9 OZ |
| Colour | Black |
| Dimensions (H x W x D) | 21.5 x 14.5 x 12 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Clamps |

Features

- Can be used outdoors in a garden or near a pool.
- Amplifier with output of 30 Watts RMS , 60 Watts Max.
- Has built in FM Radio, MP3 - USB Input, Aux & Microphone.
- Has the input to connect to any external source of music, be it your phone , laptop, desktop, set top box, etc.
- Class D Audio amplifier with MP3 / FM Radio & USB input and remote.

Amplifier Specs

| | |
|--------------------------|--|
| Rated Power | 30 Watts RMS |
| Input | Mic: 35MV / 600 ohms Aux: 400MV / 10K |
| Frequency Response | Volume: Bass +- 10 dB / Treble +- 10 dB at 10 Hz 80 Hz - 20 kHz (+-3dB) |
| Power | AC220V/50Hz |
| Dimensions (H X W X D) | 65 x 280 x 180 mm |
| Weight | 1.5 Kg |

AS-407T4



Speaker Specs

| | |
|----------------------------|---|
| Suitable For | Homes, Offices, Hotels, Restaurants, Retail Stores, Temples, Indoor/Outdoor. (Upto 500 Sq. Ft.) |
| Loudspeaker Type | 2 Way On Wall, Book Shelf, Bass Reflex |
| LF Woofer | 4 inch Polypropylene Cone Mid Bass |
| HF Tweeter | 1 inch Polycarbonate Tweeter |
| Impedance | 8 ohms |
| Sensitivity | 89 dB |
| Power Handling | 50 Watts RMS - 80 Watts Max |
| LMT | Optional |
| Frequency Response | 60 Hz - 20 kHz |
| Net Weight (1 Pair) | 3 Kg |
| Magnet | 8.9 OZ |
| Colour | Black |
| Dimensions (H x W x D) | 21.5 x 14.5 x 12 cm |
| Applicable for 100 V Input | Optional |
| Clamps | Adjustable Wall Clamps |

Features

- Can be used outdoors in a garden or near a pool.
- Amplifier with output of 30 Watts RMS , 60 Watts Max.
- Has built in FM Radio, MP3 - USB Input, Aux & Microphone.
- Has the input to connect to any external source of music, be it your phone , laptop, desktop, set top box, etc.
- Class D Audio amplifier with MP3 / FM Radio & USB input and remote.

Amplifier Specs

| | |
|--------------------------|--|
| Rated Power | 30 Watts RMS |
| Input | Mic: 35MV / 600 ohms Aux: 400MV / 10K |
| Frequency Response | Volume: Bass +- 10 dB / Treble +- 10 dB at 10 Hz 80 Hz - 20 kHz (+-3dB) |
| Power | AC220V/50Hz |
| Dimensions (H X W X D) | 65 x 280 x 180 mm |
| Weight | 1.5 Kg |

KV-871-L

Specs

| | |
|------------------------|---|
| Suitable For | Home, Corporate Offices, Retail Stores, Hospitals and more. |
| Loudspeaker Type | On Wall Cubes |
| LF Woofer | 2.25 inch Full Range Driver |
| Impedance | 8 ohms |
| Power Handling | 25 Watts RMS - 50 Watts Max |
| Sensitivity | 87 dB |
| LMT | Optional |
| Frequency Response | 100 Hz - 20 kHz |
| Net Weight (1 Pair) | 1 Kg |
| Magnet | Ferrite |
| Colours | Black |
| Dimensions (H x W x D) | |
| Clamps | Adjustable Wall Mounts |

Features

- Cubes speaker
- Satellite speakers
- Wall Mount Speakers
- USB / SD Card Input
- High Wattage Amplifier

Amplifier Features

- Mic Input - 2
- Mic Volume Adjust Volume Control
- Bass Control
- Treble Control
- Mp3 Volume Control
- Aux Volume Control
- USB Input
- SD Card Input
- Mp3 Play / Pause Key
- Mp3 Previous Song Key
- Mp3 Next Song Key
- Mp3 Repeat Song Key
- Equaliser - Class/ Jazz / Rock / Bass / Pop / Normal
- Input Select Mode : USB / SD / FM / AUX
- 60 Watts



KV-872-L White Cube Audio Speaker

Suitable for Corporate Offices, Retail Showrooms, Departmental Stores, Petrol Pumps, and many more.

Features

- Cube Shaped On Wall Speaker
- Satellite Speakers
- USB / SD Card Input
- High Wattage Amplifier
- 60 Watts
- Water Resistant White Plastic Cabinet with Metal Grill.
- Wall Mount Clamps
- Driver: 2.25 inch wide range with Butyl Rubber Surround
- 2 Microphone Inputs
- Microphone Volume Adjust Control
- Bass Control
- Treble Control
- Mp3 Volume Control
- Aux Volume Control
- USB Input
- SD Card Input
- Mp3 Play / Pause Key
- Mp3 Previous Song Key
- Mp3 Next Song Key
- Mp3 Repeat Song Key
- Equalizer - Class/ Jazz / Rock / Bass / Pop / Normal
- Mode : USB / SD /FM /AUX input select
- Colour: White



KV-772-L



Cube Speaker Specs

- Satellite Speakers for main, front, surround & centre channel wide range frequency transducer.
- 2.25 inch Wide Range Drivers
- Low frequency cut off cross over network with circuit protection.
- Dimensions (W x H x D): 7 x 14 x 10 cm
- Weight: 1 Kg each.
- KV-8789-S cannot be used individually as 2.0 setup.

Mono Amplifier 40 W

India Branch:

DEMO ROOM :

**428, Dr. D.B. Marg, Lamington Road,
Raval Building, 1st Floor, Above ICICI Bank Opera House
Branch Mumabi - 400004, INDIA.**

Mobile : 9322250431

Tel : 00 91 22 - 2382 3762 / 2385 5434

Website: <http://www.pandaaudioindia.com>

www.pandaaudio.com

E-mail : choudharydeepak@yahoo.com

pandaaudioindia@gmail.com

info@pandaaudio.com

**India Branch Administration
Choudhary Trading Corporation
383, Lamington Road,
Nr Lamington Rd Police Station,
Mumbai- 400 007**